


图号：SC161H-PYGE


客户确认签名：

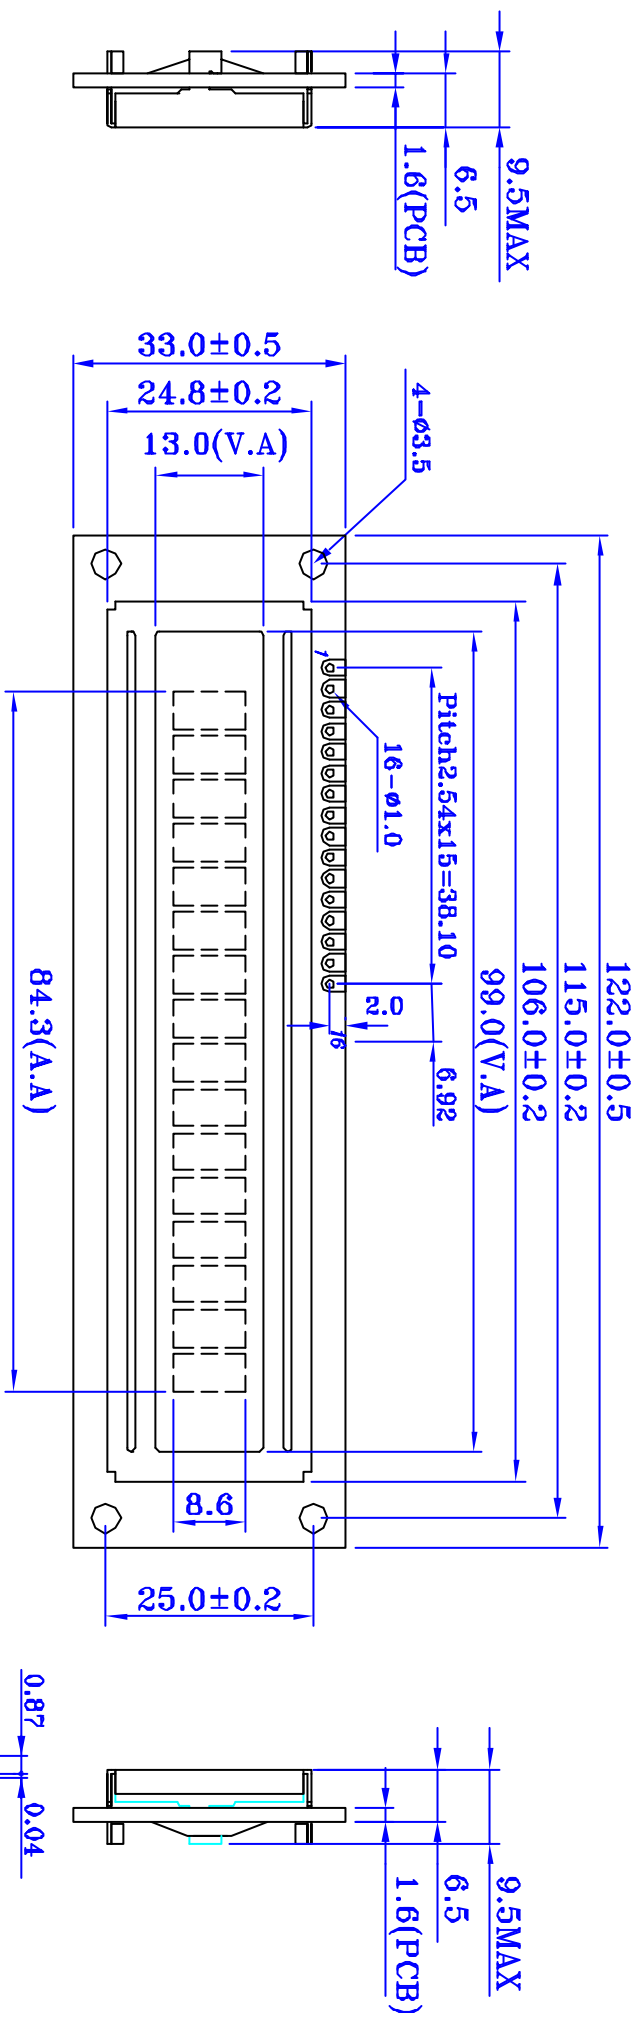

PIN	SYMBOL	FUNCTION
1	V _{SS}	POWER SUPPLY (GND)
2	V _{DD}	POWER SUPPLY (+5V)
3	V _{BT}	BRIGHTNESS ADJUSTMENT(+2.8V)
4	R _S	REGISTER SELECT SIGNAL
5	R/ \bar{W}	READ/WRITE SIGNAL
6	K	ENABLE SIGNAL
7	DB0	DATA BUS LINE
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	DATA BUS LINE
13	DB6	
14	DB7	
15	NC	NO CONNECTION
16	NC	NO CONNECTION

NOTE:

UNLESS OTHERWISE SPECIFIED STANDARD TOLERANCE $\pm 0.3 \text{ mm}$.



Display Pattern

项目	姓名	日期
制图	袁旭东	06/11/12
审核	王勇聪	06/11/12
批准	杜辉	06/11/12
单位	mm	
比例	1:1	
版本	A/1	

型号

SC161H-PYGE

客户型号



SMARTDISPLAYS

西安海晶光电科技有限公司
SMARTDISPLAYS (XI'AN) CO., LTD