


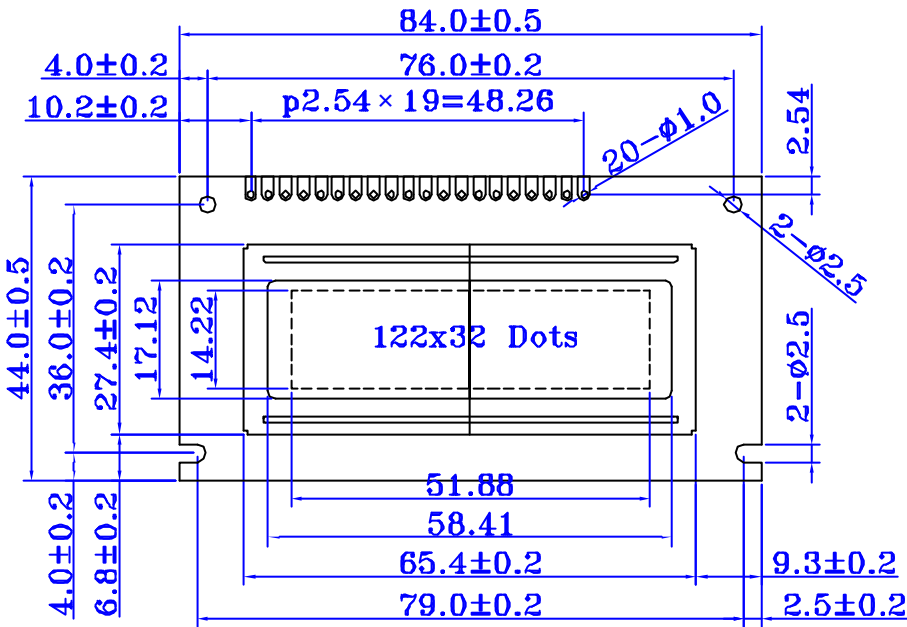
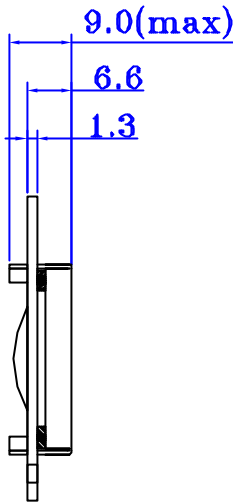


Without BKL



NOTE:
UNLESS OTHERWISE SPECIFIED STANDARD TOLERANCE $\pm 0.3\text{mm}$.

LED BKL

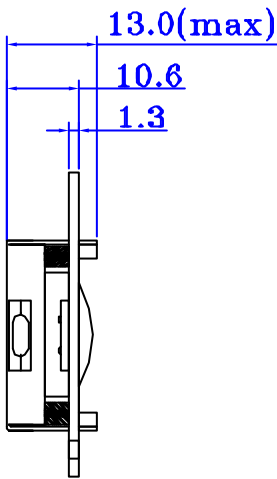

Display Pattern

PIN	SYMBOL	FUNCTION
1	Vss	POWER SUPPLY (GND)
2	Vdd	POWER SUPPLY (+5V)
3	Vo	POWER SUPPLY FOR LCD DRIVING
4	A0	DATA/INSTRUCTION
5	CS1	CHIP SELECT FOR IC1
6	CS2	CHIP SELECT FOR IC2
7	CL	
8	RD _(n)	
9	WR _(n)	
10	DB0	DATA BUS LINE
11	DB1	
12	DB2	
13	DB3	
14	DB4	
15	DB5	
16	DB6	
17	DB7	
18	RES	RESET
19	LED+	POWER SUPPLY LED+
20	LED-	POWER SUPPLY LED-

项目	姓名	日期	型号	SG12232D-LCM
制图	李旭东	06/1/12		
审核	王勇强	06/1/12	客户型号	
批准	杜辉	06/1/12		
单位	mm			西安海晶光电科技有限公司 SMARTDISPLAYS (XI'AN) CO., LTD
比例	1:1			
版本	A/1			