
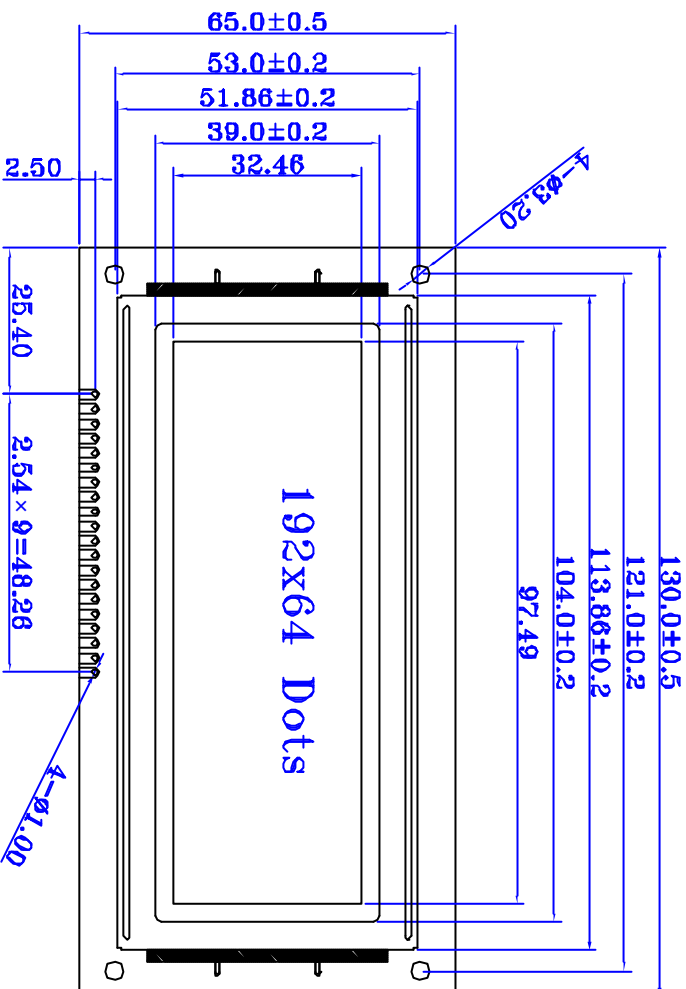
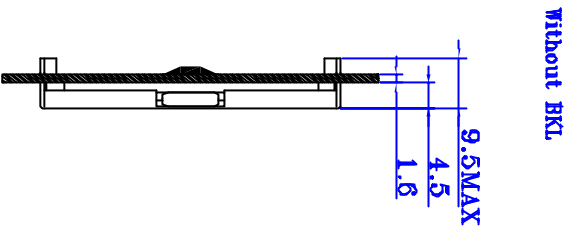



PIN	SYMBOL	FUNCTION
1	V _{ss}	POWER SUPPLY (GND)
2	V _{dd}	POWER SUPPLY (+5V)
3	V _o	CONTRAST ADJUST
4	D/I	DATA/INSTRUCTION
5	R/W	READ/WRITE SIGNAL
6	E	ENABLE SIGNAL
7	DB0	DATA BUS LINE
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	
13	DB6	
14	DB7	
15	CS1	CHIP SELECT FOR IC1
16	R _{ES}	RESET
17	CS2	CHIP SELECT FOR IC2
18	CS3	CHIP SELECT FOR IC3
19	V _{ee}	POWER SUPPLY FOR LCD DRIVING
20	BL+	POWER SUPPLY LED+

NOTE:
UNLESS OTHERWISE SPECIFIED STANDARD TOLERANCE ±0.3mm.



Display Pattern

项目	姓名	日期	型号		客户型号
制图	李旭东	06/1/12			
审核	王勇强	06/1/12	SG19264A-LCM		
批准	杜 辉	06/1/12			
单位	mm				
比例	1:1		西安海晶光电科技有限公司		
版本	A/1				

		SMARTDISPLAYS (XI'AN) CO., LTD
--	---	--------------------------------



SMARTDISPLAYS (XI'AN) CO., LTD