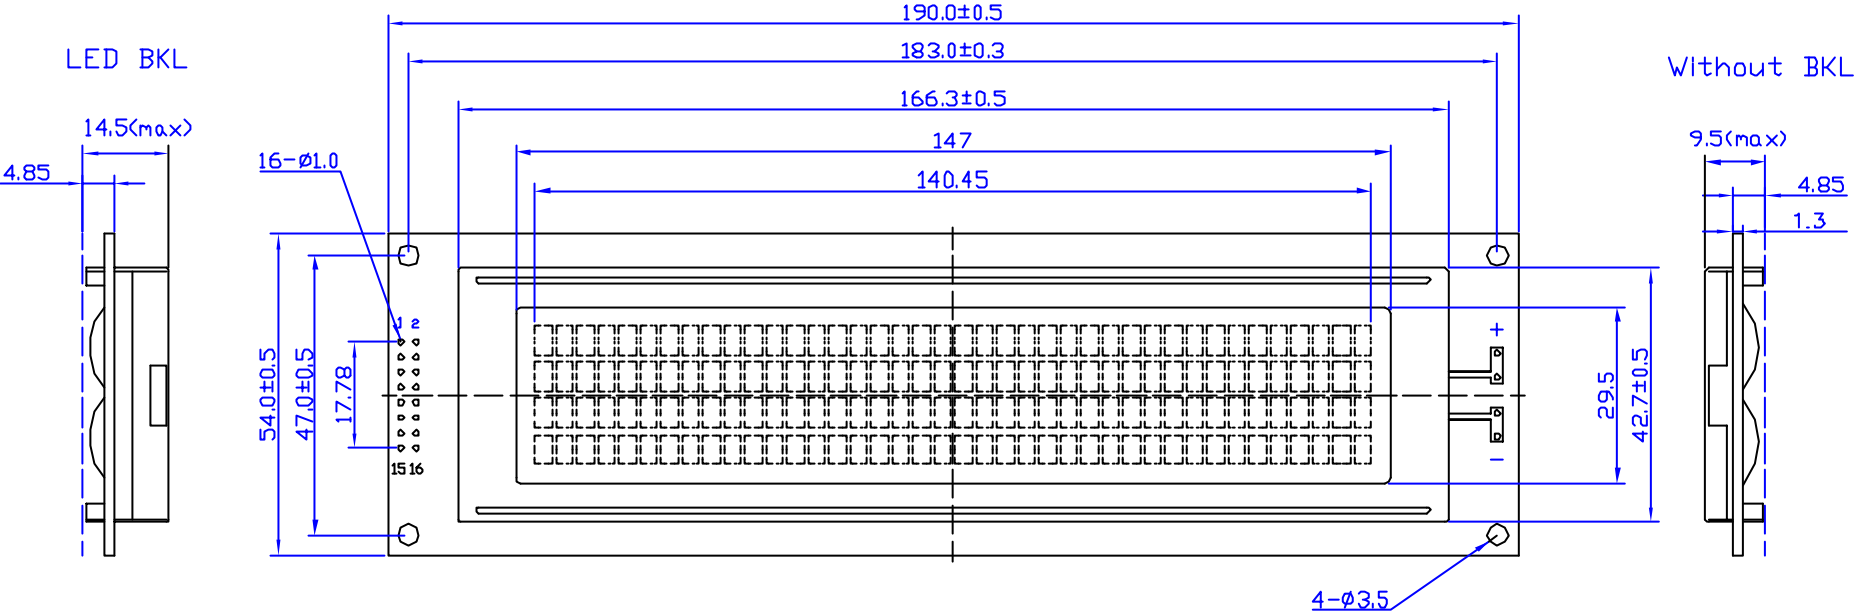


Display Pattern

PIN	SYMBOL	FUNCTION
1	DB7	DATA BUS LINE
2	DB6	
3	DB5	
4	DB4	
5	DB3	
6	DB2	
7	DB1	
8	DB0	
9	E1	ENABLE SIGNAL OF U1
10	R/W	READ/WRITE SIGNAL
11	RS	REGISTER SELECT
12	Vo	CONTRAST ADJUST
13	Vss	POWER SUPPLY (GND)
14	Vdd	POWER SUPPLY (+5V)
15	E2	ENABLE SIGNAL OF U2
16	NC	
17/+	LED+	POWER SUPPLY FOR BL+
18/-	LED-	POWER SUPPLY FOR BL-

NOTE:
UNLESS OTHERWISE SPECIFIED STANDARD TOLERANCE $\pm 0.3\text{mm}$.

项目	姓名	日期	型号	SC404C-LCM
制图	李旭东	06/1/12		
审核	王勇强	06/1/12	客户型号	
批准	杜 晖	06/1/12		
单位	mm			西安海晶光电科技有限公司 SMARTDISPLAYS (XI'AN) CO., LTD
比例	1:1			
版本	A/1			